

# Apollo4 Blue Low Power SoC Family


## Product Brief

Ambiq, the leader in low-power System-on-Chip (SoC) design, has once again raised the bar with the Apollo4 Blue SoC. With the lowest dynamic and sleep mode power on the market, the Apollo4 Blue SoC allows designers of next generation wearables and smart devices to take their innovative products to the next level.


The Apollo4 Blue SoC family is the 4<sup>th</sup> generation system processor solution built upon Ambiq's proprietary Subthreshold Power-Optimized Technology (SPOT) platform. The Apollo4's complete hardware and software solution enables the battery-powered endpoint devices of tomorrow to achieve a higher level of intelligence without sacrificing battery life. The Apollo4 Blue with its 32-bit Arm® Cortex®-M4 core with Floating Point Unit (FPU) is implemented on the TSMC® 22nm ULL process. The Apollo4 Blue is available now with BGA packaging, as well as Bluetooth® LE.

With up to 2MB of MRAM and 1.8MB of SRAM, the Apollo4 Blue has more than enough compute and storage to handle complex algorithms and neural networks while displaying vibrant, crystal-clear, and smooth graphics. If additional memory is required, an external memory is supported through Ambiq's multi-bit SPI and eMMC interfaces.

The Apollo4 Blue is purpose-built to serve as both an application processor and a coprocessor for battery-powered endpoint devices, including smartwatches, children's watches, fitness bands, animal trackers, far-field voice remotes, predictive health and maintenance, and the smart home.

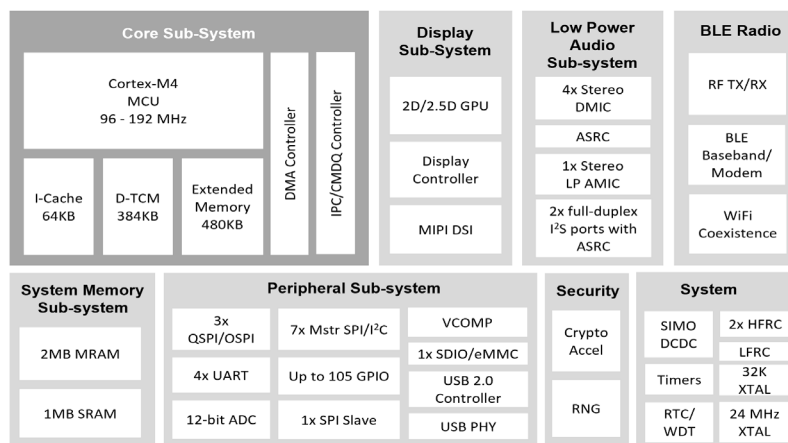

Block Diagram for the Ultra-Low Power Apollo4 Blue SoC

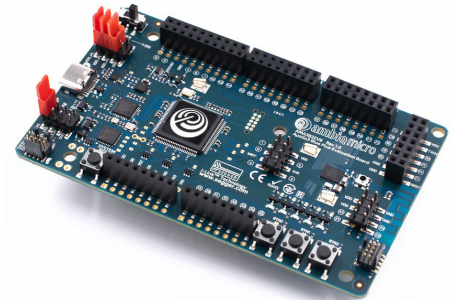

Apollo Family

### Feature Highlights:

- Achieving an unmatched 3  $\mu$ A/MHz executing from SRAM or MRAM with cache, and 1.5  $\mu$ A sleep mode with RTC<sup>1</sup>
- Up to 192 MHz clock frequency with TurboSPOT™
- 2D/2.5D graphics accelerator and MIPI DSI 1.2 with up to two lanes at 500Mbps per lane delivering a feature-rich user interface
- Apollo4 Blue MCU is embedded with Bluetooth Low Energy 5 radio including Angle of Arrival (AOA) and Angle of Departure (AOD) for always-on applications
- Proprietary audio interfaces and ultra-low power analog microphone for truly always on voice processing
- Serves as an applications processor with a fully integrated audio subsystem and interface to BT/BLE 5/WiFi radios
- Includes an extensive set of digital and analog peripheral interfaces with integrated ADCs and digital sensor processing using the integrated serial master ports
- 8 PDM channels, 2 stereo I<sup>2</sup>S channels with ASRC, and an ultra-low power ADC for analog mics
- Microcontroller implemented with TSMC 22nm ULL process and Arm Artisan Physical IP

## Features and Specifications

### Ultra-Low Supply Current

- 3  $\mu$ A/MHz executing from MRAM (with cache)
- 3  $\mu$ A/MHz executing from SRAM
- Low power sleep mode with RTC and 8KB SRAM retention

### High-Performance Arm Cortex-M4 Processor with FPU

- Up to 192 MHz clock frequency
- Floating Point Unit (FPU)
- Memory Protection Unit (MPU)
- Secure Boot

### Bluetooth Low Energy 5

- 2 Mbps, extended advertising packets
- AOA/AOD
- Tx: 4 mA @ 0 dBm, Rx 4 mA
- Tx: -20 dBm to +10 dBm output power
- Rx Sensitivity: -97 dBm at 1 Mbps, -94 dBm at 2 Mbps

### Ultra-Low Power Memory

- Up to 2MB of non-volatile MRAM for code/data
- Up to 1.8MB of low power SRAM for code/data

### Ultra-Low Power Interface for On- and Off-Chip Sensors

- 12-bit ADC, 11 selectable input channels
- Up to 2.8 MS/s sampling rate
- Temperature sensor with +/-3°C accuracy

### Ultra-Low Power Flexible Serial Peripherals

- 3x 2/4/8-bit SPI master interfaces
- 7x I<sup>2</sup>C/SPI masters for peripheral communication
- 1x SPI slave for host communications
- 4x UART modules with flow control
- 1x USB 2.0 HS/FS device controller
- 1x SDIO (SD3.0)/1x eMMC (v4.51)

### Display

- MIPI DSI 1.2 with 2 data lanes up to 500 Mbps
- Up to 640 x 480 resolution
- 4 layers with alpha blending
- Frame Buffer Decompression

### Graphics

- 2D/2.5D graphics accelerator
- Full Alpha Blending
- Texture and Frame Buffer Compression

### Audio Processing

- 1x stereo Low Power Analog microphones
- 4x stereo Digital microphones
- 2x full-duplex I<sup>2</sup>S ports with ASRC

### Rich Set of Clock Sources

- 16-52 MHz and 32.768 kHz Crystal (XTAL) oscillators
- 1 kHz Low Frequency RC (LFRC) oscillator
- 2x High Frequency RC (HFRC) oscillator – 192/384 MHz

### Power Management

- Operating range: 1.71-2.2 V, -40°C to 85°C
- SIMO buck
- Multiple I/O voltages supported

### Applications

- Smart watches/bands
- Wireless sensors and IoT
- Activity and fitness monitors
- Children's watches
- Animal trackers
- Motion and tracking devices
- Alarms and security system
- Far-field voice remotes
- Consumer medical devices
- Predictive maintenance
- Smart home

### Package Options

- 4.7 mm x 4.7 mm, 131-pin SIP BGA

### Ordering Information

- AMA4B2KK-KBR



AMA4B2KK-KBR

<sup>1</sup> Assumes ideal DC-DC stepdown from 3.3 V to 1.8 V.

